


Modification Career

NO:	Modification	Modified by	Approved by	Date

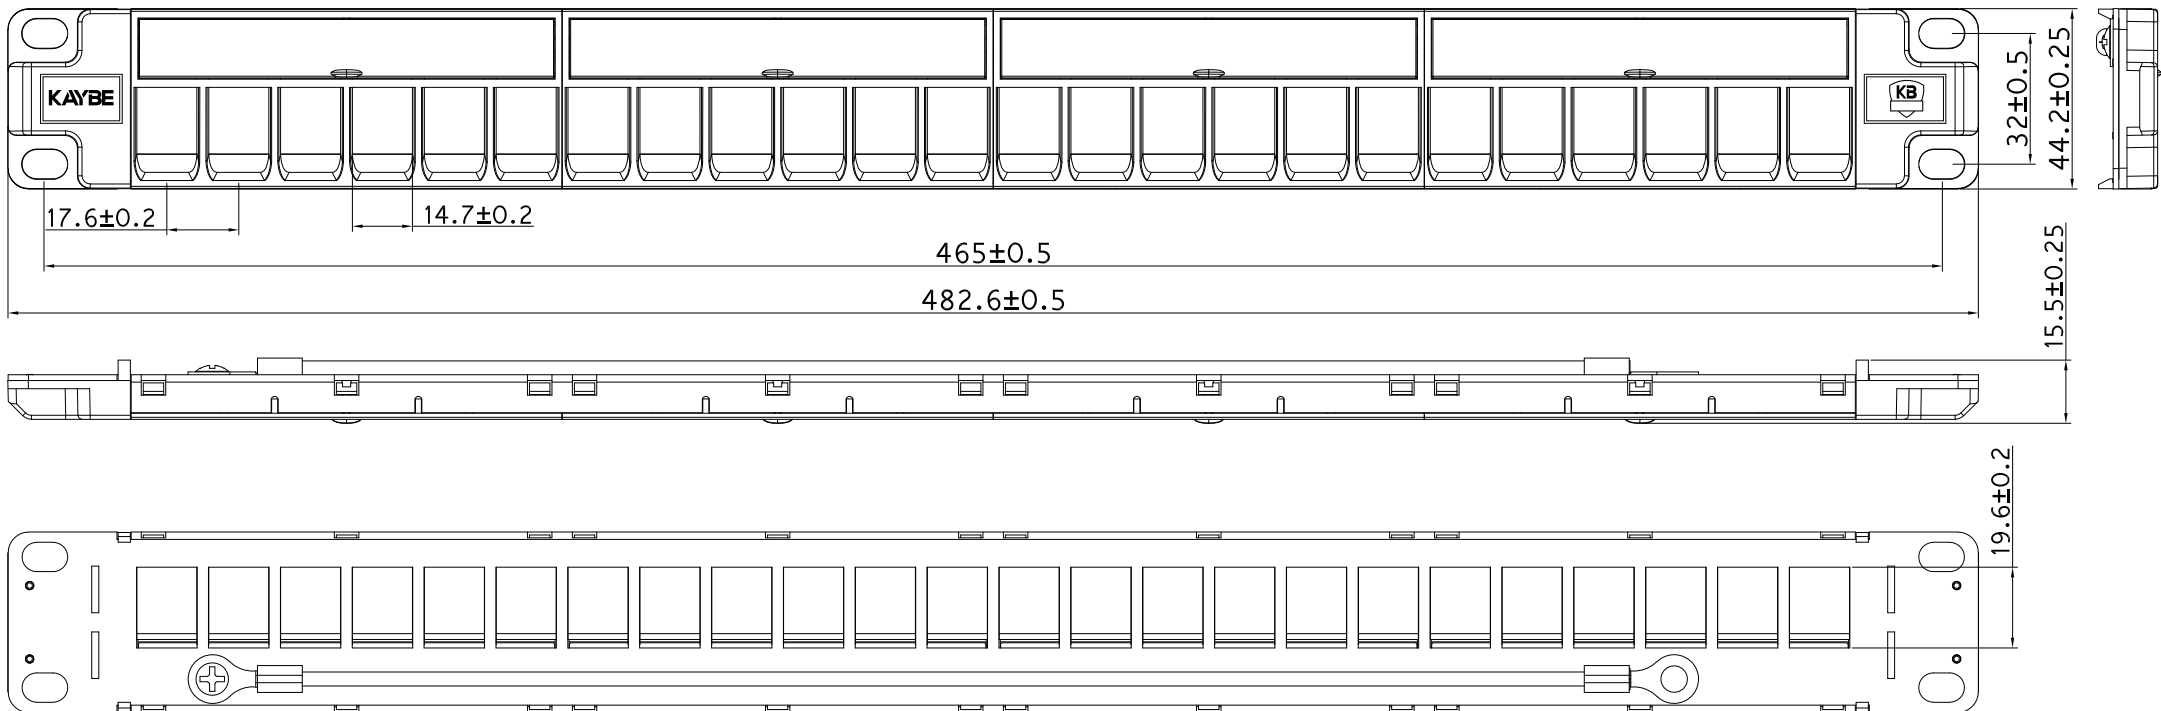

**NOTES:**

**ENVIRONMENTAL:**

1. Operating temperature range :-10°C- +60°C
2. Storage temperature range :-40°C-70°C
3. Operating humidity range:10%-90%

**MECHANICAL:**

1. Front Fram: Cold-rolled stell, SPCC,T=1.5mm, with with Nickel plating
2. Cable Holder: Cold-rolled stell, SPCC,T=1.5mm, with plastic powder plating, RAL9004
3. Plastic parts: high quality engineering plastic



Unit	mm	Client	Tolerances	
REV		Weight	.X	$\pm 0.1$
Scale		Material	.XX	$\pm 0.05$
Product NO:			Angle	$\pm 0.5^\circ$
Designed by			First angle projection	
Verified by				
Approved by				
Description:			<b>BC6BPP24M1</b> <b>CAT6 24PORT UN-LOADED PATCH PANEL</b>	