
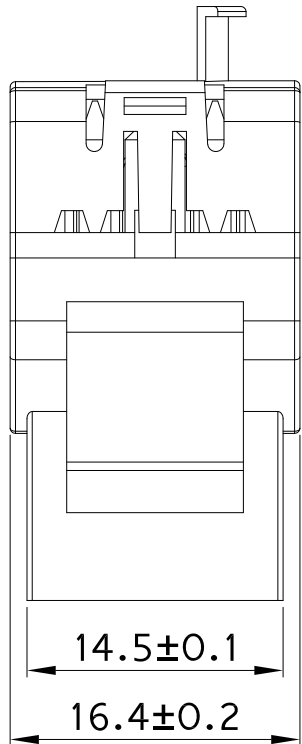
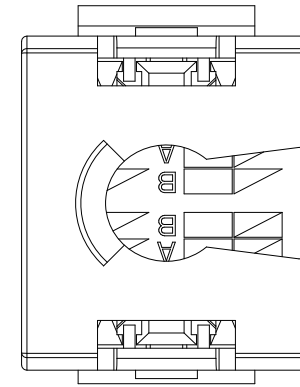
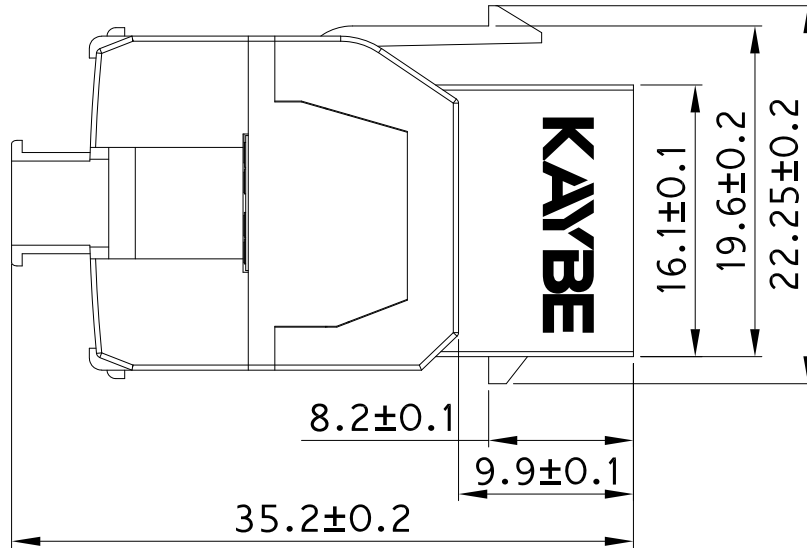


Modification Career

NO:	Modification	Modified by	Approved by	Date

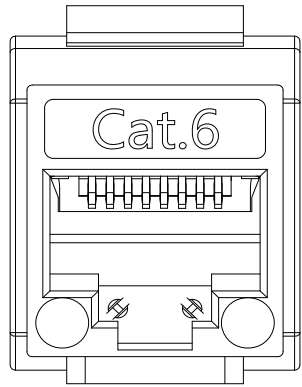

NOTES:

ELECTRICAL:

1. Current Rating: 1.5 Amps
2. Contact Resistance: ≤20 mΩ RRENT RATING
3. DC/AC Volt Endurance: DC1000V/AC750V 1min
4. Insulation Resistance: ≥ 500 MΩ
5. TIA Cat.6 Perm.Link Test: Worst Pair NEXT Headroom ≥3.0dB

ENVIRONMENTAL:

1. Operating temperature range :-10°C-+60°C
2. Storage temperature range :-40°C-70°C
3. Operating humidity range:10%-90%

MECHANICAL:

1. Plastic parts: high quality engineering plastic
2. PCB: FR-4, 1.2mm thickness
3. Jack Wire: 0.35 mm Phosphor bronze gold over nickel plating
4. IDC conductor: 0.5mm Phosphor bronze, tin-plating
5. Contact compatibility :accommodate 26 to 23 AWG solid
6. Plug Insertion Life ≥750 cycles
7. Durability : 200 termination cycles

14.5±0.1

16.4±0.2

Made in Taiwan



Designed by Verified by Approved by	Unit	mm	Client	Tolerances .X ±0.1 .XX ±0.05 Angle ±0.5° First angle projection
	REV		Weight	
	Scale		Material	
Product NO: BC6KJ180-1				
Description: Cat6 UTP Keystone 180 degree				

