




2CORE 16AWG CABLES - CMR, LSZH, HFFR - UNSHIELDED

PRODUCT NO.: SPR/2150

DESCRIPTION: Available in CMR, LSZH & HFFR Jackets

16AWG is up to 1.5 sq.mm

The KAYBE 2-Core 16AWG Speaker Cable provides high-quality audio performance with durable CMR, LSZH, and HFFR-rated jacketing for fire safety and low smoke emissions. Its unshielded design offers flexibility and ease of installation without compromising sound clarity. Perfect for home, office, and commercial audio systems.

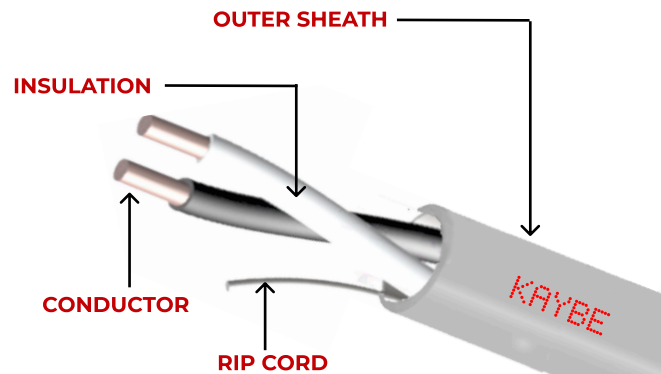

STANDARD REFERENCES

UL Rating	CMR, LSZH, FR-PVC, HFFR
UL Flammability	UL 1666 Vertical Shift
ISO/IEC Flammability	IEC 60332-1
UL Voltage Rating	300V RMS
Certification	CE ROHS certified

PACKAGING

Packaging	305M Wooden Spool x 2 Drums per box
Weight	11.5 Kg/roll

CONSTRUCTION DATA SHEET

Item	Audio & Security Cable
CONDUCTOR	
Conductor	2 Cores
Material	Stranded Oxygen Free Copper
AWG	16 AWG
Structure	26x29
INSULATION	
Material	PE
Average Thickness	0.30mm
Diameter	2.10mm
RIP Cord	Yes, Nylon
PE Color	Black & Red
OUTER JACKET	
Material	CMR, LSZH, HFFR
Average Thickness	0.43mm
Diameter	4.7 + 0.2mm
Color	Grey / Purple
PRINTING	KAYBE Speaker & Control Cable (SPR/2150) 305M..
LENGTH	305METERS (1000FT)

ELECTRICAL PARAMETERS

Temperature Rating	-20°C To +75°C
Operating Voltage	300V RMS Max.
Dc Resistance	14ohms/1M1 Nom
Capacitance Between conductor to Shield1Khz	60pF/ft Nom.

ORDERING INFORMATION AS PER FOLLOWS

PART NO	DESCRIPTION	COLOR	WEIGHT
SPR/U2150	2CORES 16AWG, SPEAKER CABLES, CMR PVC, UNSHIELDED	Grey	32kg/km
SPR/LS2150	2CORES 16AWG, SPEAKER CABLES, LSZH, UNSHIELDED	Purple	33.6kg/km
SPR/HF2150	2CORES 16AWG, SPEAKER CABLES, HFFR, UNSHIELDED	Grey	33.6kg/km