




### 2CORE 14AWG CABLES - CMR, LSZH, HFFR - UNSHIELDED

**PRODUCT NO.:** SPR/2200

**DESCRIPTION:** Available in CMR, LSZH & HFFR Jackets

The KAYBE 2-Core 14AWG Cable offers superior signal transmission with CMR, LSZH, and HFFR-rated jacketing for fire safety and low smoke emissions. Its unshielded design provides flexibility and ease of installation while maintaining excellent performance. Ideal for audio and power applications in residential, commercial, and public spaces.

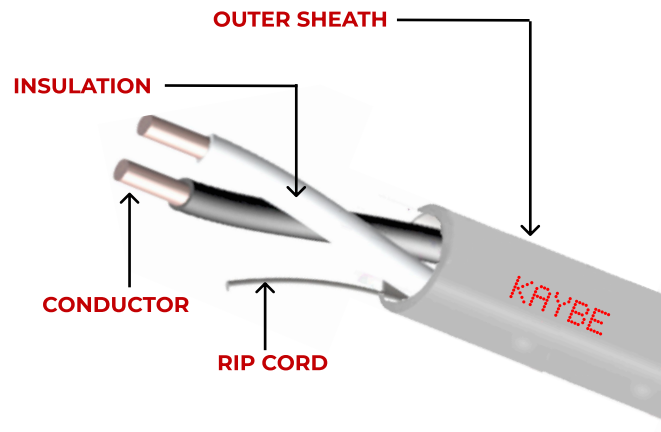

### STANDARD REFERENCES

UL Rating	PVC, LSZH, HFFR
UL Flammability	UL 1666 Vertical Shift
ISO/IEC Flammability	IEC 60332-1
UL Voltage Rating	300V RMS
Certification	CE ROHS certified

### PACKAGING

Packaging	305M x 2 Rolls per box Wooden Roll per 305M (1000FT)
-----------	---

## CONSTRUCTION DATA SHEET

Item	Audio & Security Cable
<b>CONDUCTOR</b>	
Conductor	2 Cores
Material	Stranded Bare Copper
AWG	14 AWG
Structure	105x0.16mm
<b>INSULATION</b>	
Material	PVC
Average Thickness	>0.50mm
Diameter	2.8mm
RIP Cord	Yes, Nylon
PE Color	1. Black: RAL9005 2. Red: RAL3000
<b>OUTER JACKET</b>	
Material	PVC, LSZH, HFFR
Average Thickness	>0.60mm
Diameter	7.10 + 0.2mm
Color	Grey / Purple
<b>PRINTING</b>	KAYBE Speaker & Control Cable (SPR/2200) 305M..
<b>LENGTH</b>	305METERS (1000FT)

## ELECTRICAL PARAMETERS

Temperature Rating	-20°C To +75°C
Operating Voltage	300V RMS Max.
Dc Resistance	14ohms/1M1 Nom
Capacitance Between conductor to Shield1Khz	60pF/ft Nom.

## ORDERING INFORMATION AS PER FOLLOWS

PART NO	DESCRIPTION	COLOR	WEIGHT
SPR/U2200	2CORES 14AWG, SPEAKER CABLES, CMR PVC, UNSHIELDED	Grey	59.5kg/km
SPR/LS2200	2CORES 14AWG, SPEAKER CABLES, LSZH, UNSHIELDED	Grey	62.5kg/km
SPR/HF2200	2CORES 14AWG, SPEAKER CABLES, HFFR, UNSHIELDED	Purple	62.5kg/km