


### 4 CORES RVVP CABLE - SHIELDED 0.75MM2

**PRODUCT NO.:** 4 CORE (0.75-4) RVVP

**DESCRIPTION:** upto 18awg

The KAYBE 4 Cores RVVP Cable - Shielded 0.75mm<sup>2</sup> ensures reliable signal transmission with shielding to reduce interference. Its bare copper conductors provide excellent conductivity and durability. Ideal for control systems, security applications, and audio setups in various environments.

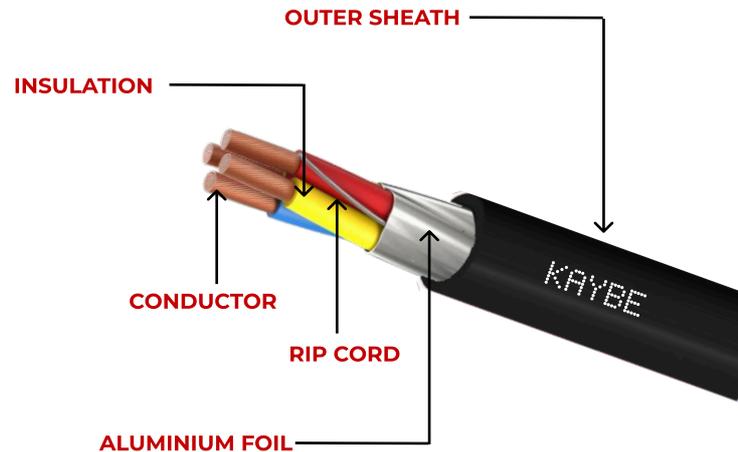

### STANDARD REFERENCES

|               |                    |
|---------------|--------------------|
| Certification | CE, ROHS certified |
|---------------|--------------------|

### PACKAGING

|           |   |
|-----------|---|
| Packaging | 100 Meter Roll<br>Or 2 Rolls of wooden reel 305meters per box |
|-----------|---|

## CONSTRUCTION DATA SHEET

| CONDUCTOR                               |  |
|---|--|
| Conductor                               | 4 Cores  |
| Material                                | Tin copper   |
| Cross section                           | 0.75mm <sup>2</sup>  |
| Diameter                                | 24/0.20mm  |
| INSULATION                              |  |
| Material                                | PVC  |
| Average Thickness                       | 0.40mm   |
| Diameter                                | 1.95 ± 0.10 mm   |
| RIP Cord                                | Yes, Nylon   |
| Colors                                  | Brown, Blue, Black and Yellow Green                              |
| LAY TYPE                                |  |
| Laid Up                                 | All of the 4 Cores twisted together with suitable lay            |
| SHIELDING                               |  |
| Polytape                                | 100% coverage separator on each cores                            |
| Alu Tape Foil + Shielding Al Mylar Tape | Available  |
| Braiding                                | 70% Coverage<br>100% COPPER BRAIDING                             |
| Separator Over Braiding                 | Polyster Tape  |
| Drain Wire                              | Not Available  |
| OUTER JACKET                            |  |
| Material                                | Flame Retardant PVC  |
| Average Thickness                       | 0.80mm   |
| Diameter                                | 6.70+/- 0.30MM   |
| Color                                   | Black or Grey  |
| PRINTING                                |  |
|   | KAYBE RVVP (4CORE) 0.75-4 SHIELDED CABLE ROHS CERTIFIED 001M ... |
| LENGTH                                  |  |
|   | 100meters or 305meters   |

## ELECTRICAL PARAMETERS

|                     |                     |
|---------------------|---------------------|
| Temperature Rating  | -10°C To +70°C      |
| Operating Voltage   | 500V per minute max |
| Dc Resistance: 20°C | 26 Ohms/Km          |
| Elongation          | 200%                |