



KAYBE[®]
Right transmission for the future

CONNECTING
PERFORMANCE

CAT6A & CAT7 LAN CABLES



Reliable. High Performance. Future Ready.



HIGH SPEED
DATA TRANSFER



PREMIUM
QUALITY



WIDE RANGE OF
APPLICATIONS



100% TESTED
FOR RELIABILITY



PRODUCT CATALOG

COMPLETE CABLING SOLUTIONS



COMMERCIAL
BUILDINGS



DATA CENTERS



SECURITY
SYSTEMS



SMART HOMES



INDUSTRIAL
APPLICATIONS

<https://kaybenetworking.com/lan-cables/>





CAT6A & CAT7 LAN CABLES

1. CAT6A 10G ULTRA SERIES - U/UTP CABLE
2. CAT6A 10G ULTRA SERIES - U/FTP CABLE
3. CAT6A 10G ULTRA SERIES - S/FTP CABLE
4. CAT6A 10G ULTRA OUTDOOR - S/FTP CABLE
5. CAT6A 10G ULTRA OUTDOOR - FTP CABLE
6. CAT7 10G GRAND SERIES - S/FTP CABLE





CAT6A 10G ULTRA SERIES - U/UTP CABLE

PART NO.: CAT6A10GUTP

DESCRIPTION: ULTRA 10G CAT6A, 4PAIR UTP CABLE

KAYBE CAT6A 10G Ultra Series - U/UTP cable is engineered for 10 Gigabit Ethernet, offering reliable performance with up to 500 MHz bandwidth. Its unshielded twisted pair design minimizes interference, ensuring stable and fast connections. Ideal for high-speed networks, it's perfect for data centers and demanding installations.

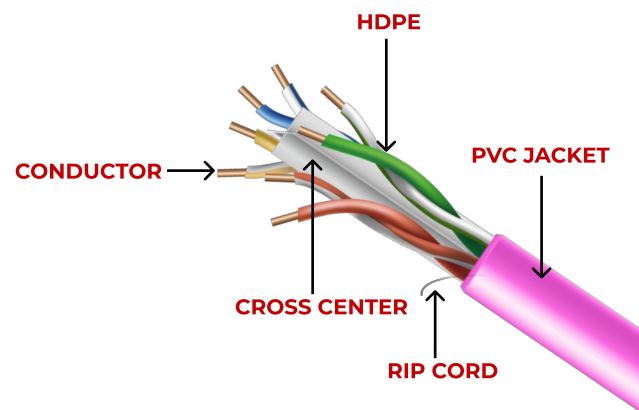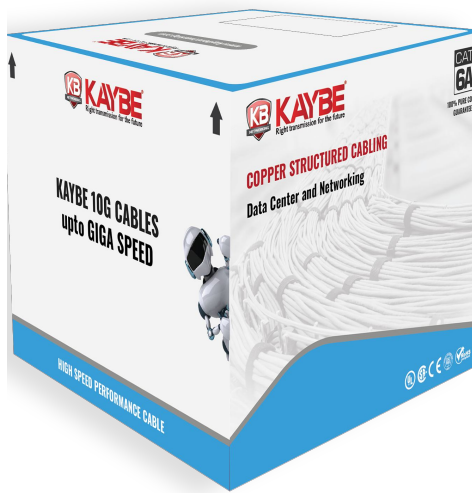

HIGH FREQUENCY ELECTRICAL PARAMETERS

FREQ (MHz)	INSERTION LOSS (Solid)	RETURN LOSS	NEXT	ACRF	PROP. DELAY	PS NEXT	PS ACRF
1	2.1	20.0	74.3	67.8	570	72.3	64.8
4	3.8	23.0	65.3	55.8	552	63.3	52.8
8	5.6	24.5	60.8	49.7	547	58.8	46.7
10	5.9	25.0	59.3	47.8	545	57.3	44.8
16	7.5	25.0	56.2	43.7	543	54.2	40.7
20	8.4	25.0	54.8	41.8	542	52.8	38.8
25	9.4	24.3	53.3	39.8	541	51.3	36.8
31.25	10.5	23.6	51.9	37.9	540	49.9	34.9
62.5	15.0	21.5	47.4	37.9	539	45.4	28.9
100	19.1	20.1	44.3	27.8	538	42.3	24.8
200	27.6	18.0	39.8	21.8	538	37.8	18.8
250	31.1	17.3	38.3	19.8	536	36.3	16.8
300	34.3	16.8	37.1	18.3	536	35.1	15.3
400	40.1	15.9	35.3	15.8	536	33.3	12.8
500	45.3	15.2	33.8	13.8	536	31.8	10.8

CONSTRUCTION DATA SHEET

CONDUCTOR	
Conductor Material	Solid Bare Copper
Conductor (mm)	1 /0.565+/-0.002mm
INSULATION	
Insulation Material	HDPE (High Density Polyethylene)
Insulation Min. Avg. Thickness	0.220 mm
Insulation Min. Thickness	0.195 mm
PAIR TWISTING	
Pair - 1	Blue & White/Blue
Pair - 2	Orange & White/Orange
Pair - 3	Green & White/Green
Pair - 4	Brown & White/Brown
INNER SHIELD	
4 Pair Laid Up	All of the 4pair twisted together With Separator i.e. Cross Filler
Foil	AL Foil + Drain Wire
OUTER SHEATH	
Material	LSZH / FR-PVC
Min. Avg. Thickness (mm)	0.80 mm
Min. Thickness (mm)	0.70 mm
Approximate O.D.	7.8 mm +/- 0.3mm
Color	Purple Color (RAL 4005)

ELECTRICAL PARAMETERS

Characteristic Impedance(Zo)	85~115Ω (1~500 MHz)
DC. Resistance Capacitance Unbalance	5%
Pair-to-Ground Capacitance Unbalance	330 pF/100M Max
Conductor Resistance	7.32Ω/ 100M 20°C Max
Mutual Capacitance	5600 pF/100m Max
Spark Test	2.5KV
Nominal Velocity of Propagation (NVP)	68%

ORDERING INFORMATION AS PER FOLLOWS

PART NO	DESCRIPTION	PACKAGING
CAT6A10GUTP	CAT6A 10G SERIES - U/UTP CABLE	100 meter/box (1000ft)
CAT6A10GUTP	CAT6A 10G SERIES - U/UTP CABLE	305 meter/drum (1000ft)
CAT6A10GUTP	CAT6A 10G SERIES - U/UTP CABLE	500 meter/drum (1640ft)

COMPATIBLE KAYBE PRODUCTS


CAT 6A STP - Tool less Keystone Jack	CAT 6A STP - Rj45 Connectors 50u	CAT 6A SFTP Patch Cords	CAT 6A Patch Panel - STP 24port & 48port
--------------------------------------	----------------------------------	-------------------------	--

CAT6A 10G ULTRA SERIES - U/FTP SERIES

PART NO.: CAT6A10G680

DESCRIPTION: CAT6A 23AWG CABLE, SHIELDED CABLE, PVC

KAYBE CAT6A 10G Ultra Series - U/FTP cable is designed for 10 Gigabit Ethernet, providing up to 650 MHz bandwidth with enhanced shielding to reduce interference. Its foil shielding ensures stable, high-speed connections even in high-demand environments. Perfect for data centers and enterprise networks, it guarantees reliable performance.

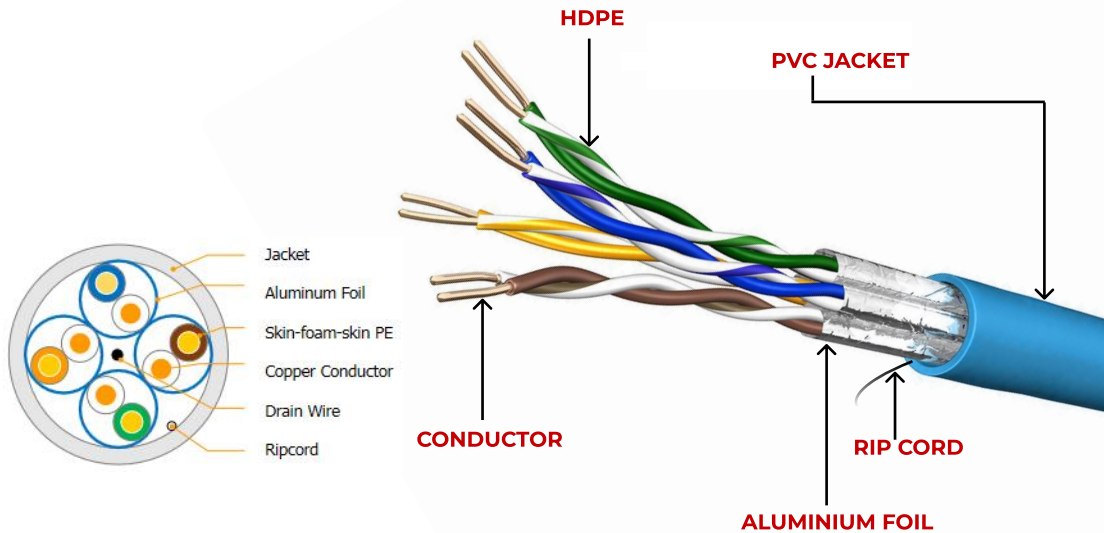

HIGH FREQUENCY ELECTRICAL PARAMETERS

FREQ (MHz)	INS LOSS (dB/100m) Max.	NEXT Pair to Pair (dB/100m) Min.	NEXT Power Sum (dB/100m) Min.	ELFEXT Pair to Pair (dB/100m) Min.	ELFEXT Power Sum (dB/100m) Min.	Return Loss (dB/100m)
1	2.3	74.3	72.3	67.8	64.8	20.0
4	3.8	65.3	63.3	55.8	52.8	23.0
8	5.3	60.8	58.8	49.7	46.7	24.5
10	5.9	59.3	57.3	47.8	44.8	25.0
16	7.5	56.0	54.0	43.7	40.7	25.0
20	8.4	54.0	52.0	41.8	38.8	25.0
25	9.4	53.3	51.3	39.8	36.8	24.3
31.25	10.5	51.9	49.9	37.9	34.9	23.6
62.5	15.0	47.4	45.4	31.9	28.9	21.5
100	19.1	44.3	42.3	27.8	24.8	20.1
250	31.1	38.3	36.3	19.8	18.8	17.3
300	34.3	37.1	35.1	18.3	16.8	17.3
400	40.1	35.3	33.3	15.8	15.3	17.3
500	45.3	33.8	31.8	13.8	12.8	17.3

CONSTRUCTION DATA SHEET

CONDUCTOR	
Description	CAT6A 23 AWG X 4 Pairs Solid Conductor
Conductor Material	Solid Bare Copper
No. Of Strands	1 Nos
Conductor (mm)	0.57 ± 0.015 mm
INSULATION	
Insulation Material	Skin-foam-skin PE
Insulation Thickness	0.25MM
Insulation Diameter	1.37 ± 0.10 mm
PAIR TWISTING	
Pair - 1	Blue + White-Blue
Pair - 2	Orange + White-Orange
Pair - 3	Green + White-Green
Pair - 4	Brown + White-Brown
LAYING STAGE	
4 Pair Laid Up	All of the 4pair twisted together and Shielded
RIP Cord	Yes, 210D
SHIELDING	
Polyester Tape	100% Coverage
Al-Mylar Tape	100% Coverage
Drain Wire	1/0.400± 0.008 ATC
OUTER JACKET	
Material	PVC/LSZH
Thickness (mm)	0.60 mm (Nominal)
Diameter (mm)	7.90 ± 0.10 mm
Colour	Sky Blue / Ash Gray

ELECTRICAL PARAMETERS

Conductor Resistance (20°C)	≤9.0Ω/100m
Electrical Resistance Unbalance (20°C)	≤2.0%
Insulation Resistance	>5000 MΩ.km
Pair to Ground Capacitance Unbalance (0.8 kHz or 1kHz)	≤160 pF/100m
Nominal Velocity of Propagation (NVP)	69 %
Skew	45 ns/100m
Operating Frequency, maximum	500 MHz

ENVIRONMENTAL REQUIREMENTS

Operating Temperature, range	-20°C to +60°C
Storage Temperature, range	-10°C to +50°C
Installation Temperature, range	-5°C to +40°C
Flame retardant	IEC 60332-1
All Materials Comply with 2011/65/EU (ROHS 2.0)	

ORDERING INFORMATION AS PER FOLLOWS

MATERIAL CODE	DESCRIPTION	PACKAGING
CAT6A10G680	CAT6A 10G SERIES U/FTP CABLE, PVC	305 meter/500 meter drum

COMPATIBLE KAYBE PRODUCTS

CAT 6A STP - Tool less Keystone Jack	CAT 6A STP - RJ45 Connectors 50u	CAT 6A SFTP Patch Cords	CAT 6A Patch Panel - STP 24port & 48port
--------------------------------------	----------------------------------	-------------------------	--





CAT6A 10G ULTRA SERIES - S/FTP CABLE

PART NO.: CAT6ASFTP775LZ

DESCRIPTION: ULTRA 10G CAT6A, S/FTP, LSZH, 23AWG CABLE

The CAT6A 10G Ultra Series - S/FTP cable delivers superior performance with individual shielding for each pair and an overall foil shield to eliminate interference. Supporting up to 500 MHz bandwidth, it ensures reliable 10 Gigabit Ethernet connectivity. Ideal for high-speed, high-demand environments like data centers and enterprise networks.

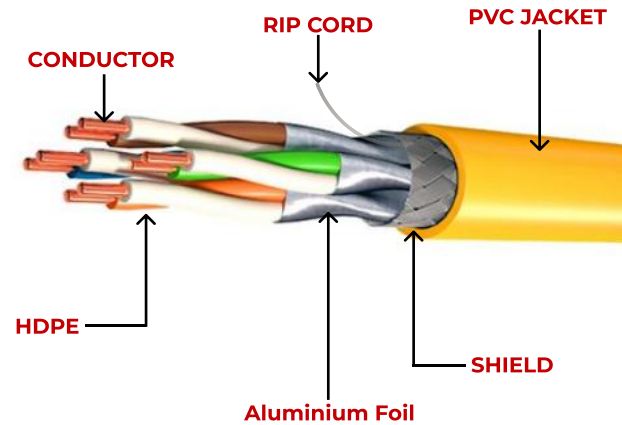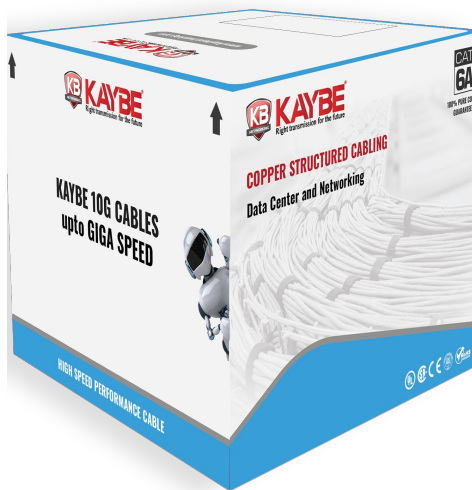

HIGH FREQUENCY ELECTRICAL PARAMETERS

FREQ (MHz)	INSERTION LOSS (Solid)	RETURN LOSS	NEXT	ACRF	PROP. DELAY	PS NEXT	PS ACRF
1	2.1	20.0	74.3	67.8	570	72.3	64.8
4	3.8	23.0	65.3	55.8	552	63.3	52.8
8	5.6	24.5	60.8	49.7	547	58.8	46.7
10	5.9	25.0	59.3	47.8	545	57.3	44.8
16	7.5	25.0	56.2	43.7	543	54.2	40.7
20	8.4	25.0	54.8	41.8	542	52.8	38.8
25	9.4	24.3	53.3	39.8	541	51.3	36.8
31.25	10.5	23.6	51.9	37.9	540	49.9	34.9
62.5	15.0	21.5	47.4	37.9	539	45.4	28.9
100	19.1	20.1	44.3	27.8	538	42.3	24.8
200	27.6	18.0	39.8	21.8	538	37.8	18.8
250	31.1	17.3	38.3	19.8	536	36.3	16.8
300	34.3	16.8	37.1	18.3	536	35.1	15.3
400	40.1	15.9	35.3	15.8	536	33.3	12.8
500	45.3	15.2	33.8	13.8	536	31.8	10.8

CONSTRUCTION DATA SHEET

Operating Temperature	—5°C TO 40°C
Conductor Material	Solid Bare Copper
Conductor Diameter (mm)	23AWG
Insulation Material	Skin-foam-skin PE
Insulation Diameter	1.38 mm
Rip Cord	210D
Braid	Yes
Coverage	≥30%
Aluminium Foil	Yes
Sheath Material	LSZH
Jacket Thickness (mm)	0.6
Diameter Over Jacket (mm)	8.0±0.5

ELECTRICAL PARAMETERS

Conductor Resistance (20°C)	≤ 9.5Ω/100m
Electrical Resistance Unbalance (20°C)	≤ 2.0%
Insulation Resistance	>5000 MΩ.km
Pair to Ground Capacitance Unbalance (0.8 kHz or 1kHz)	≤ 160 pF/100m
Nominal Velocity of Propagation (NVP)	69 %
Skew	45 ns/100m
Operating Frequency, maximum	500 MHz

ORDERING INFORMATION AS PER FOLLOWS

PART NO	DESCRIPTION	PACKAGING
CAT6ASFTP775LZ	CAT6A 10G SERIES - S/FTP CABLE	100 meter/box (1000ft)
CAT6ASFTP775LZ	CAT6A 10G SERIES - S/FTP CABLE	305 meter/drum (1000ft)
CAT6ASFTP775LZ	CAT6A 10G SERIES - S/FTP CABLE	500 meter/drum (1640ft)

COMPATIBLE KAYBE PRODUCTS

CAT 6A STP - Tool less Keystone Jack	CAT 6A STP - Rj45 Connectors 50u	CAT 6A SFTP Patch Cords	CAT 6A Patch Panel - STP 24port & 48port
--------------------------------------	----------------------------------	-------------------------	--




CAT6A 10G ULTRA OUTDOOR - S/FTP CABLE

PART NO.: CAT6ASFTP777PE

DESCRIPTION: ULTRA 10G CAT6A, OUTDOOR UV PE, S/FTP

KAYBE CAT6A 10G Ultra Outdoor - S/FTP cable is built for high-speed 10 Gigabit Ethernet with superior shielding to minimize interference. Designed for outdoor use, it features weather-resistant materials and individual pair shielding for reliable performance. Ideal for demanding outdoor installations, it supports up to 800 MHz bandwidth for seamless connectivity.

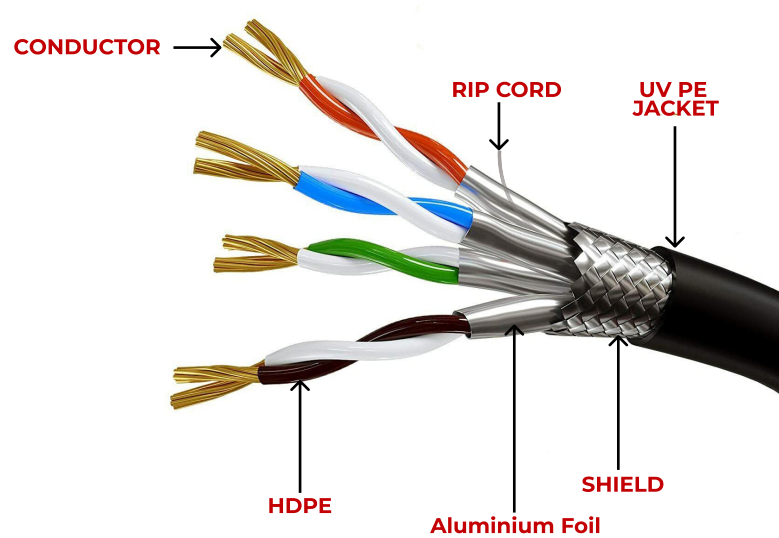

HIGH FREQUENCY ELECTRICAL PARAMETERS

FREQ (MHz)	INSERTION LOSS (Solid)	RETURN LOSS	NEXT	ACRF	PROP. DELAY	PS NEXT	PS ACRF
1	2.1	20.0	74.3	67.8	570	72.3	64.8
4	3.8	23.0	65.3	55.8	552	63.3	52.8
8	5.6	24.5	60.8	49.7	547	58.8	46.7
10	5.9	25.0	59.3	47.8	545	57.3	44.8
16	7.5	25.0	56.2	43.7	543	54.2	40.7
20	8.4	25.0	54.8	41.8	542	52.8	38.8
25	9.4	24.3	53.3	39.8	541	51.3	36.8
31.25	10.5	23.6	51.9	37.9	540	49.9	34.9
62.5	15.0	21.5	47.4	37.9	539	45.4	28.9
100	19.1	20.1	44.3	27.8	538	42.3	24.8
200	27.6	18.0	39.8	21.8	538	37.8	18.8
250	31.1	17.3	38.3	19.8	536	36.3	16.8
300	34.3	16.8	37.1	18.3	536	35.1	15.3
400	40.1	15.9	35.3	15.8	536	33.3	12.8
500	45.3	15.2	33.8	13.8	536	31.8	10.8

CONSTRUCTION DATA SHEET

Operating Temperature	—5°C TO 40°C
Conductor Material	Solid Bare Copper
Conductor Diameter (mm)	23AWG
Insulation Material	Skin-foam-skin PE
Insulation Diameter	1.38 mm
Rip Cord	210D
Braid	Yes
Coverage	≥30%
Aluminium Foil	Yes
Sheath Material	PE
Jacket Thickness (mm)	0.65
Diameter Over Jacket (mm)	8.1±0.5

ELECTRICAL PARAMETERS

Conductor Resistance (20°C)	≤ 9.5Ω/100m
Electrical Resistance Unbalance (20°C)	≤ 2.0%
Insulation Resistance	>5000 MΩ.km
Pair to Ground Capacitance Unbalance (0.8 kHz or 1kHz)	≤ 160 pF/100m
Nominal Velocity of Propagation (NVP)	69 %
Skew	45 ns/100m
Operating Frequency, maximum	500 MHz

ORDERING INFORMATION AS PER FOLLOWS

PART NO	DESCRIPTION	PACKAGING
CAT6ASFTP777PE	CAT6A 10G OUTDOOR - S/FTP CABLE	100 meter/box (1000ft)
CAT6ASFTP777PE	CAT6A 10G OUTDOOR - S/FTP CABLE	305 meter/drum (1000ft)
CAT6ASFTP777PE	CAT6A 10G OUTDOOR - S/FTP CABLE	500 meter/drum (1640ft)

COMPATIBLE KAYBE PRODUCTS

CAT 6A STP - Tool less Keystone Jack	CAT 6A STP - Rj45 Connectors 50u	CAT 6A SFTP Patch Cords	CAT 6A Patch Panel - STP 24port & 48port
--------------------------------------	----------------------------------	-------------------------	--





CAT6A 10G ULTRA OUTDOOR - FTP CABLE

PART NO.: CAT6A10GFTP-UVPE

DESCRIPTION: ULTRA 10G CAT6A, OUTDOOR UV PE, F/UTP

KAYBE CAT6A 10G Ultra Outdoor - FTP cable is engineered for 10 Gigabit Ethernet, offering enhanced foil shielding to reduce interference. Its durable, weather-resistant jacket ensures reliable performance in outdoor environments. Supporting up to 800 MHz bandwidth, it's perfect for high-speed, long-distance installations.

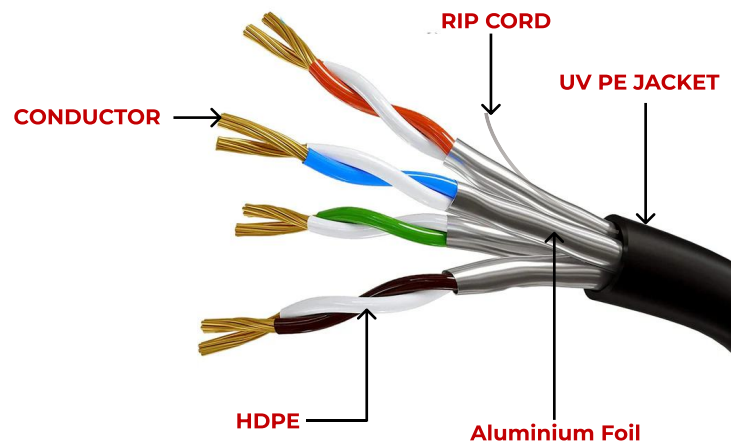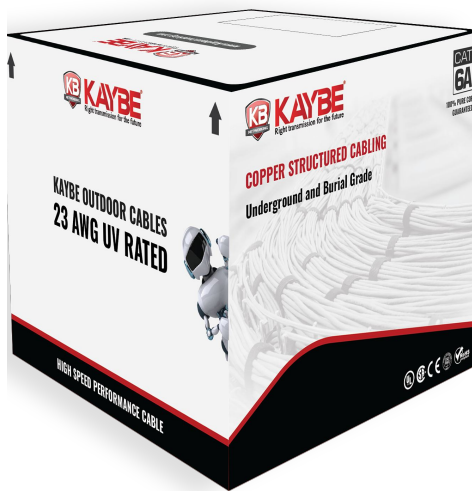

HIGH FREQUENCY ELECTRICAL PARAMETERS

FREQ	Zin	Zin	IL	RL	NEXT	PS NEXT	ELFEXT	PS ELFEXT
MHz	Ω	Ω	dB/100m	dB	dB/100m	dB/100m	dB/100m	dB/100m
1.0	81.8	122.2	≤ 2.1	≥ 20.0	≥ 74.3	≥ 72.3	≥ 67.8	≥ 64.8
4.0	86.8	115.2	≤ 3.8	≥ 23.0	≥ 65.3	≥ 63.3	≥ 55.8	≥ 52.8
8.0	88.8	112.6	≤ 5.3	≥ 24.5	≥ 60.8	≥ 58.8	≥ 49.7	≥ 46.7
10.0	89.4	111.9	≤ 5.9	≥ 25.0	≥ 59.3	≥ 57.3	≥ 47.8	≥ 44.8
16.0	89.4	111.9	≤ 7.5	≥ 25.0	≥ 56.2	≥ 54.2	≥ 43.7	≥ 40.7
20.0	89.4	111.9	≤ 8.4	≥ 25.0	≥ 54.8	≥ 52.8	≥ 41.8	≥ 38.8
25.0	88.5	112.9	≤ 9.4	≥ 24.3	≥ 53.3	≥ 51.3	≥ 39.8	≥ 36.8
31.25	87.7	114.1	≤ 10.5	≥ 23.6	≥ 51.9	≥ 49.9	≥ 37.9	≥ 34.9
62.5	84.5	118.3	≤ 15.0	≥ 21.5	≥ 47.4	≥ 45.4	≥ 31.9	≥ 28.9
100	82.0	121.9	≤ 19.1	≥ 20.1	≥ 44.3	≥ 42.3	≥ 27.8	≥ 24.8
200	79.6	125.7	≤ 27.6	≥ 18.0	≥ 39.8	≥ 37.8	≥ 21.8	≥ 18.8
250	77.6	128.8	≤ 31.1	≥ 17.3	≥ 38.3	≥ 36.3	≥ 19.8	≥ 16.8
300	76.0	131.5	≤ 34.3	≥ 17.3	≥ 37.1	≥ 35.1	≥ 18.3	≥ 15.3
400	73.4	136.2	≤ 40.1	≥ 17.3	≥ 35.3	≥ 33.3	≥ 15.8	≥ 12.8
500	71.3	140.2	≤ 45.3	≥ 17.3	≥ 33.8	≥ 31.8	≥ 13.8	≥ 10.8

CONSTRUCTION DATA SHEET

Plastic Separator	Yes
Polyester tap	Yes
Aluminum Foil	Yes
Rip Cord	210D*3
Drain Wire	TC,Yes
CONDUCTOR	
Conductor Material	Solid Bare Copper
Conductor (mm)	23 AWG
INSULATION	
Insulation Material	HDPE (High Density Polyethylene)
Insulation Diameter	1.09 ± 0.05 mm
CORE COLOR	
Pair - 1	White-Blue/Blue
Pair - 2	White-Orange/Orange
Pair - 3	White-Green/Green
Pair - 4	White-Brown/Brown
ENVIRONMENT TEMPERATURE	
Store	-10~+50°C
Installation	-5~+40°C
Work	-20~+60°C
SHEATH	
Material	PE
Thickness (mm)	0.7±0.1
Diameter (mm)	8.0±0.5
Colour	Black

ELECTRICAL PARAMETERS

Conductor Resistance (20°C)	≤9.5 Ω/ 100m
Resistance Resistance Unbalance (20°C)	≤2.0%
Insulation Resistance	>5000 MΩ·km
Pair to Ground Capacitance Unbalance (0.8 KHz or 1KHz)	≤160pF/100m

ORDERING INFORMATION AS PER FOLLOWS

PART NO	DESCRIPTION	PACKAGING
CAT6A10GFTP-UVPE	CAT6A 10G OUTDOOR - FTP CABLE	100 meter/box (1000ft)
CAT6A10GFTP-UVPE	CAT6A 10G OUTDOOR - FTP CABLE	305 meter/drum (1000ft)
CAT6A10GFTP-UVPE	CAT6A 10G OUTDOOR - FTP CABLE	500 meter/drum (1640ft)

COMPATIBLE KAYBE PRODUCTS

CAT 6A STP - Tool less Keystone Jack	CAT 6A STP - Rj45 Connectors 50u	CAT 6A SFTP Patch Cords	CAT 6A Patch Panel - STP 24port & 48port
--------------------------------------	----------------------------------	-------------------------	--




CAT7 10G GRAND SERIES - S/FTP CABLE

PART NO.: CAT710GGRAND

DESCRIPTION: GRAND 10G CAT7, S/FTP, LSZH, 23AWG CABLE

KAYBE CAT7 10G Grand Series - S/FTP cable is designed for superior performance, offering 10 Gigabit Ethernet speeds with individual pair shielding and overall foil protection. It supports up to 800 MHz bandwidth, ensuring high-speed, stable connections even in high-interference environments. Ideal for data centers and advanced networking installations.

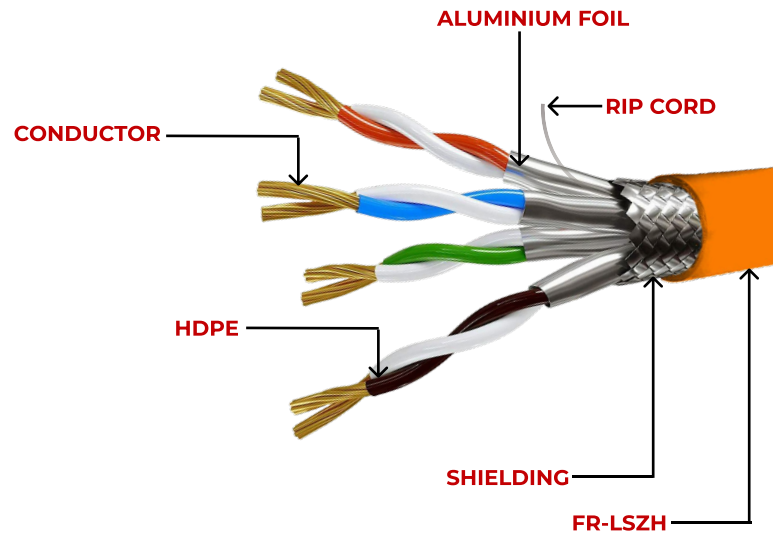

HIGH FREQUENCY ELECTRICAL PARAMETERS

FREQ (MHz)	INS LOSS (dB/100m) Max.	NEXT Pair to Pair (dB/100m) Min.	NEXT Power Sum (dB/100m) Min.	ELFEXT Pair to Pair (dB/100m) Min.	ELFEXT Power Sum (dB/100m) Min.	Return Loss (dB/100m)
1	2.3	78.0	78.0	78.0	75.0	20.0
4	3.8	78.0	78.0	78.0	75.0	23.0
8	5.3	78.0	78.0	77.2	74.2	24.5
10	5.9	78.0	78.0	75.3	72.3	25.0
16	7.5	78.0	78.0	71.2	68.2	25.0
20	8.4	78.0	78.0	69.3	66.3	25.0
25	9.4	78.0	78.0	67.3	64.3	24.3
31.25	10.5	75.5	72.5	65.4	62.4	23.6
62.5	15.0	72.4	69.4	59.4	56.4	21.5
100	19.1	67.9	64.9	55.3	52.3	20.1
250	31.1	66.4	63.4	47.3	44.3	17.3
300	34.3	65.2	62.2	45.8	42.8	17.3
400	40.1	63.4	60.4	43.3	40.3	17.3
500	45.3	61.9	58.9	41.3	38.3	17.3
600	50.1	60.7	57.7	39.7	36.7	17.3

CONSTRUCTION DATA SHEET

Operating Temperature	—15°C TO 70°C
CONDUCTOR	
Description	CAT.7/7A SFTP LSZH SHEATH CABLE
Conductor Material	Solid Bare Copper
No. Of Strands	1 Nos
Conductor (mm)	23 AWG
INSULATION	
Insulation Material	HDPE (High Density Polyethylene)
Insulation Thickness	0.30MM (Nominal)
Insulation Diameter	1.42 ± 0.10 mm
PAIR TWISTING	
Pair - 1	White-Blue/Blue
Pair - 2	White-Orange/Orange
Pair - 3	White-Green/Green
Pair - 4	White-Brown/Brown
LAYING STAGE	
4 Pair Laid Up	All of the 4pair twisted together With Separator i.e. Cross Filler
RIP Cord	Yes (Available)
SHIELDING	
Polyester Tape	100% Coverage
Al-Mylar Tape	100% Coverage
Braiding	60% Coverage
Drain Wire	1/0.400± 0.008 ATC
OUTER JACKET	
Material	LSZH (LOW SMOKE ZERO HALOGEN)
Thickness (mm)	0.60 mm (Nominal)
Diameter (mm)	8.20MM +/- 0.5
Colour	Grey or Yellow

ELECTRICAL PARAMETERS

Conductor Resistance At 20°C	93.80 Ω/Km (Maximum)
Resistance DC Unbalance	5% (Maximum)
Insulation Resistance	>500.0 MΩ/KM AT 500 VDC
Dielectric Strength	1.0 KV AC for 1 Minute (Withstood)
Spark Test	1.5 KV AC for 0.15 Seconds (Withstood)
Capacitance To 1KHz (Approx)	5.6nF/100m

COMPATIBLE KAYBE PRODUCTS

CAT 6A STP - Tool less Keystone Jack	CAT 6A STP - Rj45 Connectors 50u	CAT 7 & 6A SFTP Patch Cords	CAT 6A Patch Panel - STP 24port & 48port
--------------------------------------	----------------------------------	-----------------------------	--



KAYBE[®]

Right transmission for the future

38 YEARS

OF TRUST, QUALITY & PERFORMANCE



<https://kaybenetworking.com>



sales@kaybenetworking.com

CERTIFIED QUALITY. TRUSTED WORLDWIDE.